


## INSTRUCTIONS FOR SPRING TENSION

(Wire rod and stud  
packed with screws)

Insert wire adjusting rod in perforated collar and turn away from edge of jamb leaf. Adjust spring to the 1st or 2nd hole of tension, depending on size of door, and insert tension stud.

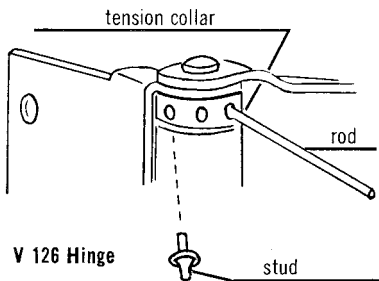

Excessive tension will cause spring breakage. Additional tension can be obtained by using 3rd hinge.

**NATIONAL MANUFACTURING CO.**  
Sterling, Illinois 61081